

Toshiba TEC EX Range

Premium Industrial Thermal Transfer Printers

The Toshiba TEC EX Range is made up of the B-EX6 Series Printer and the B-EX4T1 Series. All of which cover the most demanding applications for heavy duty industrial printing.

The rugged and durable design, advanced functionality, cost saving features and a wide choice of models allows this printer to be the ultimate all in one solution.

Applications Include:

- Retail Distribution
- Transport / Logistics
- Healthcare Labels
- Chemical Labels
- Horticultural Labels
- Pharmaceutical Labels
- Construction Labels

DURA-ID


SOLUTIONS



Speak to our experts to discuss your requirements today.

+44 (0) 114 242 2111

info@dura-id.com

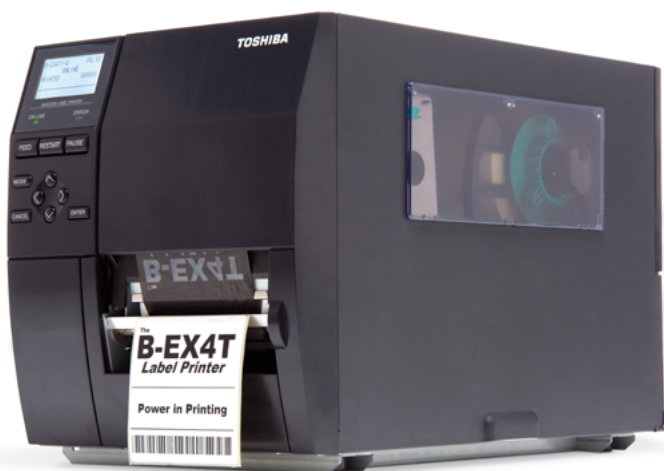

Key Features

- Print speeds of up to 14" per second
- 4"-6" maximum print width versions available
- Available in either 200 or 300 DPI
- Low cost of ownership
- Large range of optional accessories
- Rugged, robust and durable, with easy operation
- Flexible connectivity options

Product Specifications

Printer Model	B-EX4T1 - GS12	B-EX41T - TS12	B-EX6T1 - GS/TS12	B-EX6T3 - GS/TS12
Characteristics				
Printhead	Near-edge		Near-edge head	Near-edge head with cool down bar
Dimensions	H:310mm(12.2") x W:278mm(10.9") x D:460mm(18.2")		331 (W) x 480 (D) x 310 (H) mm	
Weight	14 kg		20 kg	
Interface	USB 2.0, Ethernet		USB 2.0, LAN 10/100 Base, IPv6, USB Host/RTC	
Operating Temperature	5°C to 40°C / 25-85% non-condensing			
Optional Interface	Parallel, serial, wireless LAN, RTC & USB host		RS232, Centronics, Wireless LAN, EX I/O	
Networking tool	SNMP		-	
Memory	32Mbytes SD RAM, 16Mbytes Flash ROM		System (Flash Memory) 64MB, SRAM 32MB	
Power supply	-		AC 100 to 240V, 50/60 Hz	
Print				
Method	Direct thermal / Thermal transfer			
Maximum Print Width	104 mm (4.09")		160mm	
Maximum Print Speed	14 ips (355 mm/sec)		305 mm/second (12 ips)	
Resolution	203 dpi	305 dpi	203/305 dpi (8/12 dots/mm)	
Font	Bitmap and outline		Bitmap font, Outline font, Price font, TTF, OFT	
Barcode	Includes GS1 DataBar (RSS) compatibles		UPC/EAN/JAN, Code 39, Code 93, Code 128, EAN 128, NW7, MSI, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Postnet, RM4SCC, KIX-Code, Customer Barcode, GS1 Databar	
2D codes	-		Data Matrix, PDF 417, Maxicode, QR Code, Micro PDF 417, CP Code	
Media				
Paper Width	120 mm (4.7")		50-165 mm	
Paper Alignment	Center			
Paper Roll	200 mm (7.9")			
Std. Ribbon Length	600 m (1980')		800 m (Up to 5 inch width)	600 m
Accessories				
	Cutter, rotary cutter, peel off & internal rewinder, RFID kit		Disc cutter, Peel-off module, Fan fold guide, RS232, Centronics, Wireless LAN, EX I/O, RFID Kit*	
	Ribbon save module		-	